




## *Superfeed® 3 Dual Linear*

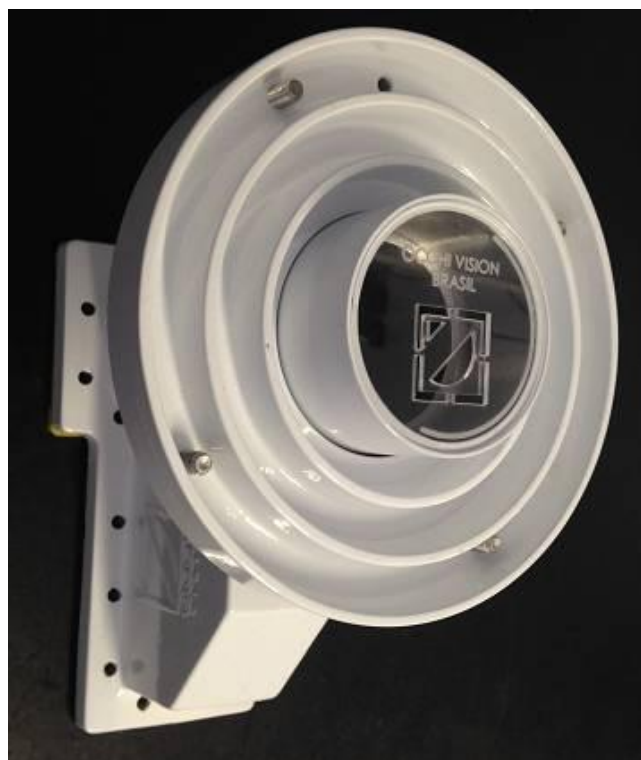

Produced in Brazil, the feed horn **Superfeed® 3 Dual** is designed for efficient and practical C Band reception, for use in professional satellite reception systems. The difference of this model is that both ports are in the same axial alignment, with Port 1 with direct reception and Port 2 with lateral reception.

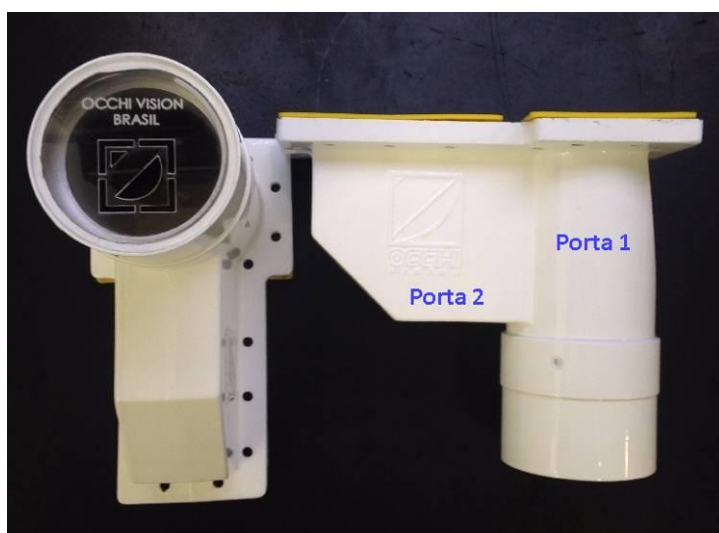

The feeder can be mounted on antennas with three or four rods, adapting to most models available on the market.

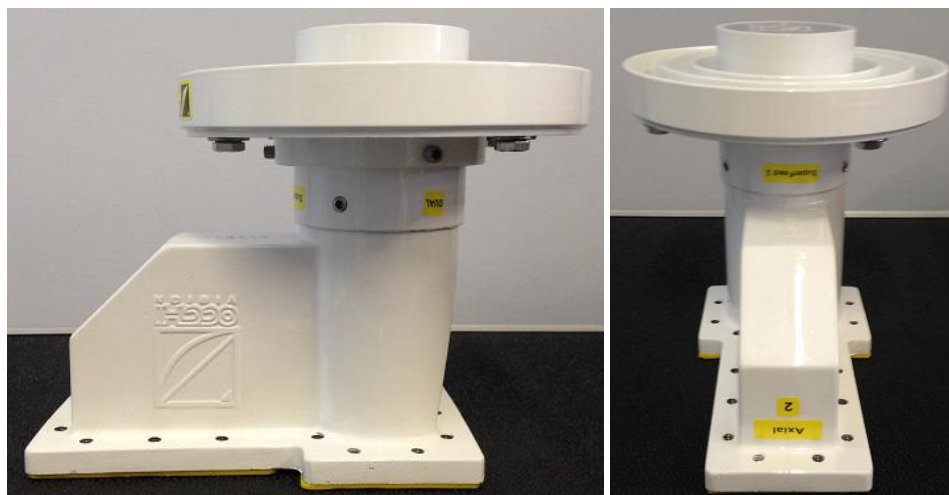

<b>Model</b>	<b>SuperFeed 3 Dual – BRSF3D</b>
<b>Polarization</b>	<b>Linear</b>
<b>Frequency Range</b>	<b>3.4 – 4.2 GHz</b>
<b>Rx Port</b>	<b>CPR 229F</b>
<b>F/D Range</b>	<b>0.31 to 0.40</b>
<b>VSWR</b>	<b>1.30:1 max.</b>
<b>Insertion Loss</b>	<b>0,20 dB</b>
<b>Return Loss</b>	<b>15 dB</b>
<b>Cross-polarization (Linear) on Axis</b>	Port 1: 28 dB Port 2: 25 dB
<b>Assembly</b>	<b>For primary focus antennas with 3 or 4 rods</b>
<b>Operating Temperature</b>	<b>-40°C to +60°C</b>
<b>Weight</b>	<b>1,8 Kg</b>
<b>Color</b>	<b>White</b>
<b>Painting</b>	<b>Electrostatic Epoxy</b>
<b>Accessories</b>	<b>Screws for LNB and scalar plate / flange protector</b>
<b>NCM</b>	<b>8529.1090</b>

*Note: Specifications subject to change without notice.  
Made in Brazil*