


Superfeed® 2 - Linear Single C Band / Appendix 30 B Version “Eutelsat”

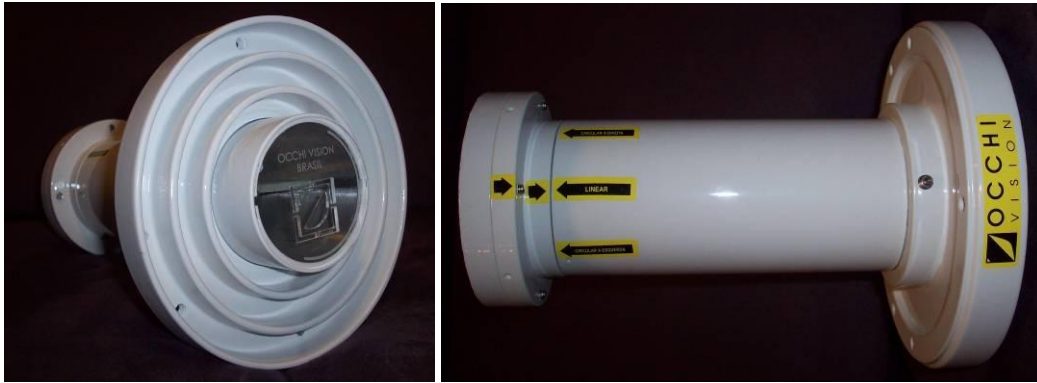

Produced in Brazil, the **Superfeed® 2** linear single version Eutelsat was designed for the reception of Band C and Appendix B with efficiency and practicality.

Technical specifications	
Model	<i>Superfeed 2 Single Version Eutelsat – SF2SVE</i>
Polarization	Linear Single
Frequency Range	3.4 to 4.8 GHz
RX Port	CPR 229F
F/D	0.30 to 0.44
VSWR	1.30:1 max.
Axial Ratio (circular)	≤ 1.9 Typical
Insertion Loss	0.15dB
Return Loss	15 dB
Feeder body and polarizer	Aluminum
Operating Temperature	-40°C to + 60°C
Assembly	For primary focus antennas with 3 or 4 rods
Peso	1,5 Kg
NCM	8529.10.90

*Note: Specifications subject to change without notice.
Made in Brazil*